

Product Information

Profibus-DP Filter box No. 252 916




TEMPOSONICS®
Wegsensoren/Position Sensors

The box is used for EMC-conformal feeding of 24 VDC supply voltage into the Profibus-DP hybrid cable.

The Bus will be protected against noise out of power lines by a filter. Additionally the filter suppresses malfunctions out of Bus signals.

- The device is for use with hybrid bus cables on both sides. Supply voltage and the Profibus wires should be together inside the cable shield.
- The stabilized 24 VDC power supply needs a shielded cable.
- Chamfered terminal blocks and standard EMC cable bushing are for easy assembling. Pls. note the specifications of Profibus user organisation (PNO).

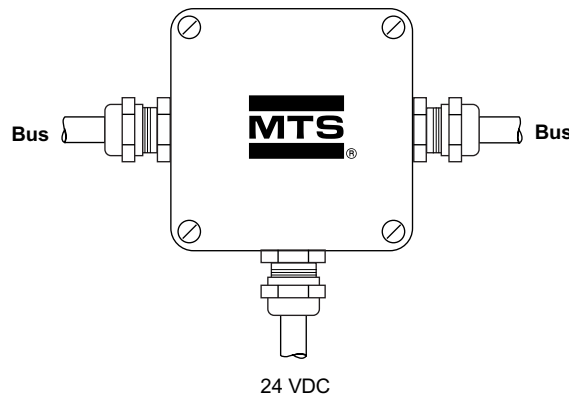

Technical Data

Nominal voltage: 24 VDC / RS 485

Nominal current: 8A

Operating temperature: -30°C ... +85 °C


Dimensions: 80 x 75 x 58 mm

EMC cable gland: PG11

Cable diameter: 4 - 10 mm

Wire gauge: 0,2 - 2,5 mm²

Typical insertion loss:

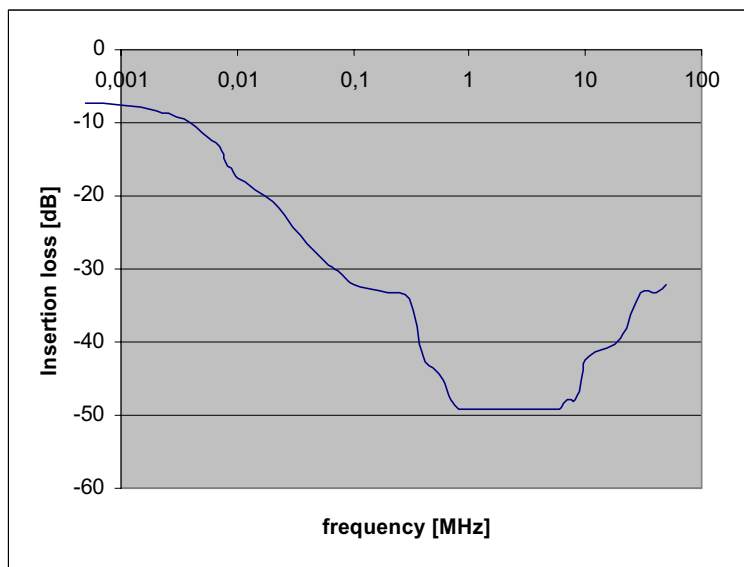

Profibus Filter box, Part No. 252 916
for TEMPOSONICS position sensors
with Profibus-DP Interface
Page 1



MTS Sensor Technologie GmbH & Co.KG
Auf dem Schüffel 9 • D-58513 Lüdenscheid, Germany
Tel. +49-2351-9587-0 • Fax +49-2351-56491
www.mtssensor.de • Email: info@mtssensor.de

Product Information

Profibus-DP Filter box No. 252 916




TEMPOSONICS®
Wegsensoren/Position Sensors

Mounting instructions


The box is equipped with EMC PG-gland bushings for strain relief and contacting the cable screen.

Note: A once built-in cable cannot be removed again. The attempt mostly leads to the damage of the cable gland. Pls. replace damaged PG's.


- Cut and remove cable jacket
- Fold braid appr. 15 mm back over jacket
- Close gland bushing

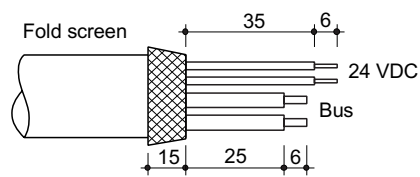

Wiring

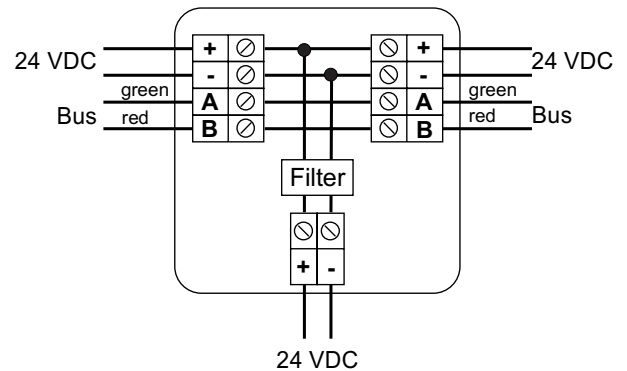

Connections sample

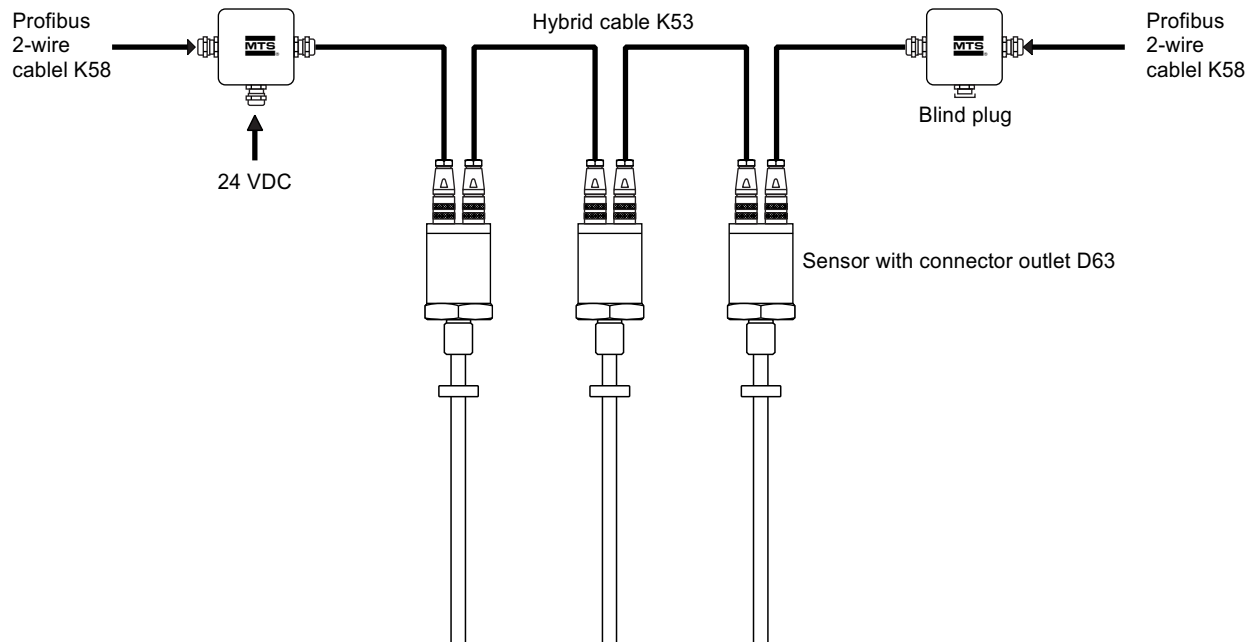

How to order:

Profibus-DP Filter box - Part No. 252 916

MTS and Temposonics® are registered trademarks of MTS Systems Corporation. All other trademarks are the property of their respective owners. Printed in Germany.

Copyright © 2013 MTS Sensor Technologie GmbH & Co. KG. Alterations reserved. All rights reserved in all media. No license of any intellectual property rights is granted. The information is subject to change without notice and replaces all data sheets previously supplied. The availability of components on the market is subject to considerable fluctuation and to accelerated technical progress. Therefore we reserve the right to alter certain components of our products depending on their availability. In the event that product approbations or other circumstances related to your application do not allow a change in components, a continuous supply with unaltered components must be agreed by specific contract.



**MTS Sensor Technologie
GmbH & Co. KG**
Auf dem Schüffel 9
58513 Lüdenscheid, Germany
Tel. + 49-23 51-95 87 0
Fax + 49-23 51-5 64 91
E-Mail: info@mtssensor.de
www.mtssensor.de

MTS Systems Corporation
Sensors Division
3001 Sheldon Drive
Cary, N.C. 27513, USA
Tel. + 1-919-677-0100
Fax + 1-919-677-0200
E-Mail: sensorsinfo@mts.com
www.mtssensors.com

MTS Sensors Technology Corp.
737 Aihara-cho,
Machida-shi, Japan
Tel. + 81-42-775-3838
Fax + 81-42-775-5516
E-Mail: info@mtssensor.co.jp
www.mtssensor.co.jp