

Data Sheet

ET Start / Stopp

Magnetostrictive Linear Position Sensors

- High operating temperature
- Compact sensor housing
- ATEX / IECEx / CEC / NEC certified



MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

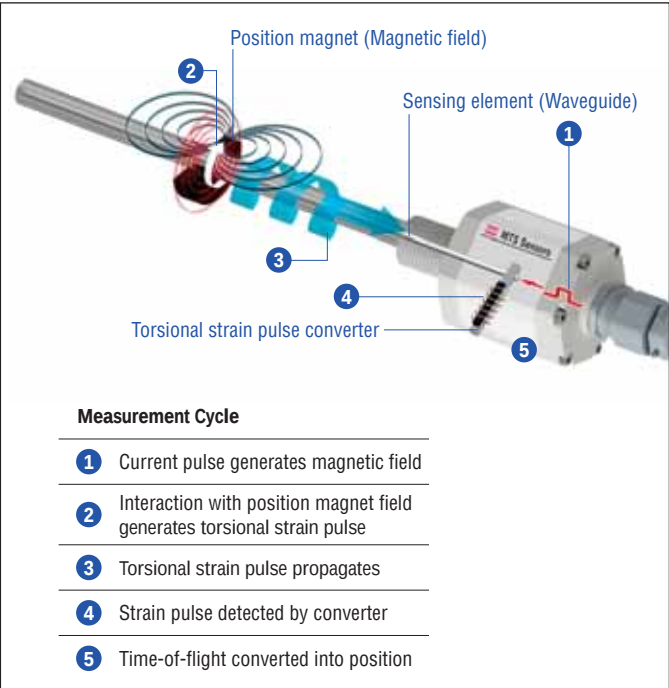


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

ET SENSOR

Robust, non-contact and wear free, the Temposonics linear position sensors provide best durability and accurate position measurement solutions in harsh industrial environments. The position measurement accuracy is tightly controlled by the quality of the waveguide which is manufactured by Temposonics. The position magnet is mounted on the moving machine part and travels contactlessly over the sensor rod with the built-in waveguide.

ET sensor specifications:

- High operating temperature up to +105 °C (+221 °F)
- Compact sensor housing
- ATEX / IECEx / CEC / NEC certified
- Sensor parameters upload function

Certification
II 3G Ex nC IIC T4 Gc II 3D Ex tc IIIC T130 °C Dc IP66 / IP68 Class I/II/III Div 2 T4 ABCDFG Class I Zone 2 T4 IIC Zone 22 AEx tc T4 IIIC Dc -40 °C ≤ Ta ≤ 105 °C, Type: 4X

Fig. 2: Certification of Temposonics® ET (version A and E)



Fig. 3: Typical application: Metal processing

TECHNICAL DATA

Output	
Start/Stop	RS-422 differential signal Serial parameter upload available for: Stroke length, offset, gradient, status, serial number and manufacturer number
Measured value	Position
Measurement parameters	
Resolution	Controller dependent
Cycle time	Controller and stroke length dependent Recommendation: Stroke length 50...1000 mm (2... 40 in.): 500 µs Stroke length 1001...2000 mm (40... 79 in.): 900 µs Stroke length 2001...3000 mm (79...118 in.): 1250 µs
Linearity ¹	≤ ±0.02 % F.S. (minimum ±60 µm)
Repeatability	≤ ±0.005 % F.S. (minimum ±20 µm) typical
Operating conditions	
Operating temperature	−40...+105 °C (−40...+221 °F)
Humidity	90 % relative humidity, no condensation
Ingress protection	With Teflon® cable (part no. 530 112): IP66 With silicone cable (part no. 530 113): IP68 (2 bar (29 psi) @ 30 min)
Shock test	100 g (single shock), IEC standard 60068-2-27
Vibration test	20 g / 10...2000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)
EMC test	Electromagnetic emission according to EN 61000-6-3 Electromagnetic immunity according to EN 61000-6-2 The sensor meets the requirements of the EU directives and is marked with CE
Operating pressure	Up to 350 bar (5076 psi)
Magnet movement velocity ²	Any
Design / Material	
Sensor electronics housing	Stainless steel 1.4305 (AISI 303); option: Stainless steel 1.4404 (AISI 316L)
Flange	Stainless steel 1.4305 (AISI 303); option: Stainless steel 1.4404 (AISI 316L)
Sensor rod	Stainless steel 1.4306 (AISI 304L); option: Stainless steel 1.4404 (AISI 316L)
Stroke length	50...3000 mm (2...118 in.)
Mechanical mounting	
Mounting position	Any
Mounting instruction	Please consult the technical drawings and the operation manual (document number: 551677)
Electrical connection	
Connection type	Cable outlet
Operating voltage	+24 VDC (−15 / +20 %)
Ripple	≤ 0.28 V _{pp}
Current consumption	Maximum 50 mA
Dielectric strength	700 VDC (DC ground to machine ground)
Polarity protection	Up to −30 VDC
Overvoltage protection	Up to ≤ 32 VDC

1/ With position magnet # 251 416-2

2/ If there is contact between the moving magnet including the magnet holder and the sensor rod, make sure that the maximal speed of the moving magnet is ≤ 1 m/s (ATEX requirement due to ESD [Electro Static Discharge])

TECHNICAL DRAWING

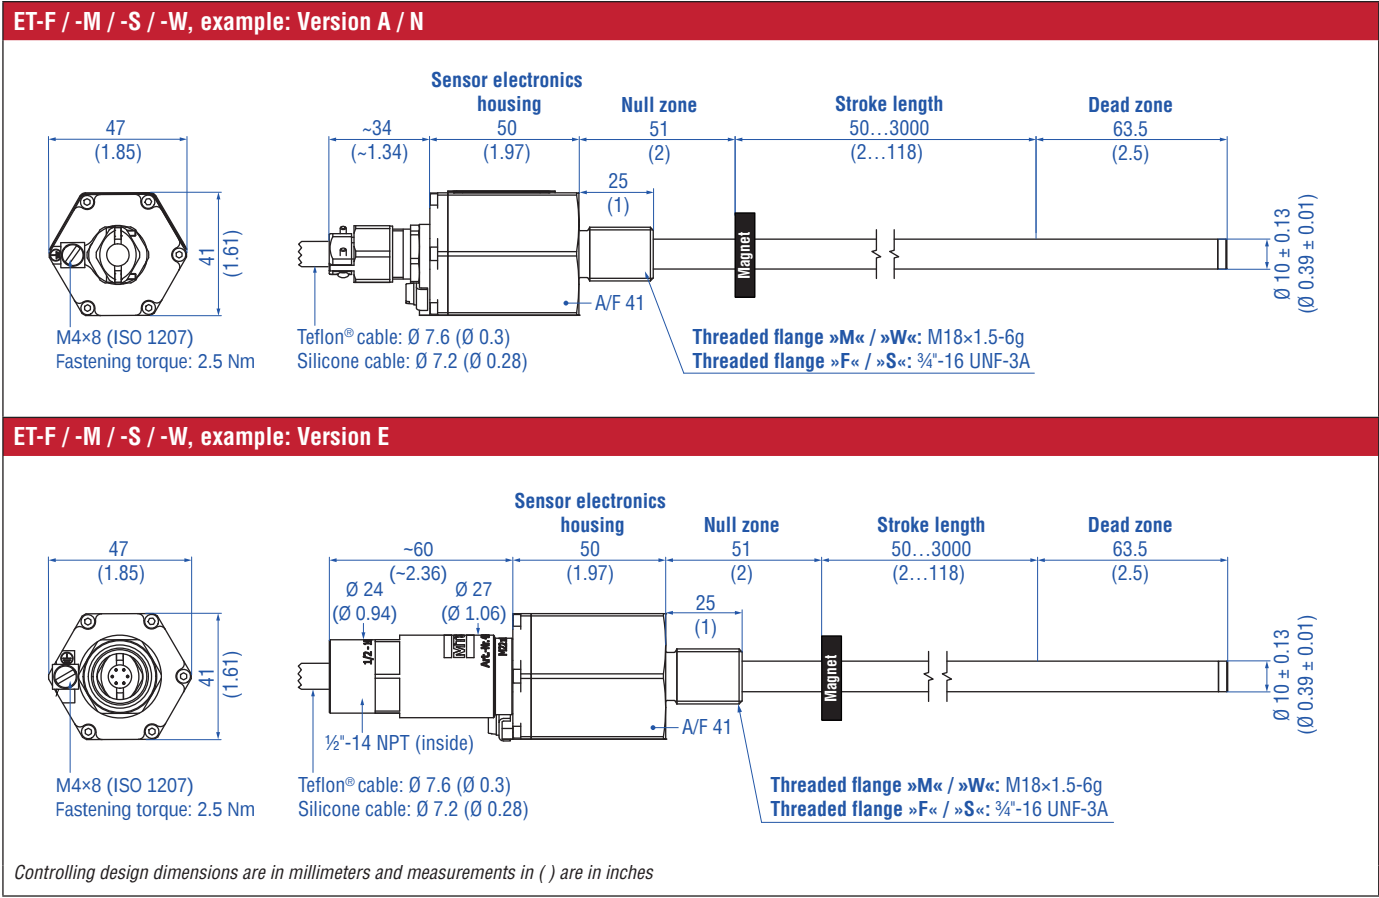


Fig. 4: Temposonics® ET with ring magnet





CONNECTOR WIRING

TXX / VXX		
Signal + power supply		
Cable	Color	Function
	GY	Stop (-)
	PK	Stop (+)
	YE	Start (+)
	GN	Start (-)
	BN	+24 VDC (-15 / +20 %)
	WH	DC Ground (0 V)

Fig. 5: Connector wiring TXX / VXX

FREQUENTLY ORDERED ACCESSORIES – Additional options available in our [Accessories Guide](#) 551444





Position magnets

			
Ring magnet OD33 Part no. 201 542-2	Ring magnet OD25.4 Part no. 400 533	Ring magnet OD17.4 Part no. 401 032	U-magnet OD33 Part no. 251 416-2
Material: PA ferrite GF20 Weight: Approx. 14 g Surface pressure: Max. 40 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)	Material: PA ferrite Weight: Approx. 10 g Surface pressure: Max. 40 N/mm ² Operating temperature: -40...+105 °C (-40...+221 °F)	Material: PA neobind Weight: Approx. 5 g Surface pressure: Max. 20 N/mm ² Operating temperature: -40...+105 °C (-40...+221 °F)	Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)

Position magnet


Magnet spacer

O-rings

			
U-magnet OD63.5 Part no. 201 553	Magnet spacer Part no. 400 633	O-ring for threaded flange (M18x1.5-6g) Part no. 401 133	O-ring for threaded flange (1/4"-16 UNF-3A) Part no. 560 315
Material: PA 66-GF30, magnets compound-filled Weight: Approx. 26 g Surface pressure: 20 N/mm ² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)	Material: Aluminum Weight: Approx. 5 g Surface pressure: Max. 20 N/mm ² Fastening torque for M4 screws: 1 Nm	Material: Fluoroelastomer 75 ± 5 durometer Operating temperature: -40...+204 °C (-40...+400 °F)	Material: Fluoroelastomer 75 ± 5 durometer Operating temperature: -40...+204 °C (-40...+400 °F)


Controlling design dimensions are in millimeters and measurements in () are in inches

Optional installation hardware




Fixing clip for rod with Ø 10 mm
Part no. 561 481

Application: Used to secure sensor rods (Ø 10 mm (Ø 0.39 in.)) when using an U-magnet or block magnet
Material: Brass, non-magnetic



Hex jam nut M18x1.5-6g
Part no. 500 018

Material: Steel, zinc, plated



Hex jam nut 3/4\"-16 UNF-3A
Part no. 500 015

Material: Zinc plated with nylon insert

Cables



Teflon® cable
Part no. 530 112

Name of cable in order code: **T**

Material: Teflon® jacket; black
Features: Twisted pair shielded
Cable Ø: 7.6 mm (0.3 in.)
Cross section: 4 × 2 × 0.25 mm²
Bending radius: 8 – 10 × Ø
(fixed installation)
Operating temperature:
–100...+180 °C (–148...+356 °F)



Silicone cable
Part no. 530 113

Name of cable in order code: **V**

Material: Silicone jacket; red
Features: Twisted pair, shielded
Cable Ø: 7.2 mm (0.28 in.)
Cross section: 3 × 2 × 0.25 mm²
Bending radius: 5 × Ø (fixed installation)
Operating temperature:
–50...+180 °C (–58...+356 °F)

ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
E	T										1		R	3
a		b	c					d			e	f	g	

a	Sensor model
E T	Rod

b	Design
	ET rod-style sensor with housing and sensor rod material stainless steel 1.4404 (AISI 316L)
F	Threaded flange ¾"-16 UNF-3A
W	Threaded flange M18×1.5-6g
	ET rod-style sensor with housing material stainless steel 1.4305 (AISI 303) and sensor rod material stainless steel 1.4306 (AISI 304L)
M	Threaded flange M18×1.5-6g
S	Threaded flange ¾"-16 UNF-3A

c	Stroke length				
X	X	X	X	M	0050...3000 mm
Standard stroke length (mm)*					Ordering steps
50 ... 500 mm					5 mm
500 ... 750 mm					10 mm
750...1000 mm					25 mm
1000...2500 mm					50 mm
2500...3000 mm					100 mm
X	X	X	X	U	002.0...118.0 in.
Standard stroke length (in.)*					Ordering steps
2 ... 20 in.					0.2 in.
20 ... 30 in.					0.5 in.
30 ... 40 in.					1.0 in.
40...100 in.					2.0 in.
100...116 in.					4.0 in.

d	Connection type
T X X	T01...T10 (1...10 m)³ XX m Teflon® cable (part no. 530 112) T03...T33 (3...33 ft)³ XX ft Teflon® cable (part no. 530 112)
V X X	V01...V10 (1...10 m)³ XX m silicone cable (part no. 530 113) V03...V33 (3...33 ft)³ XX ft silicone cable (part no. 530 113)

e	Operating voltage
1	+24 VDC (–15 / +20 %)

f	Version (see “Certification of Temposonics® ET (version A and E)” on page 2 for further information)
A	ATEX / IECEx / CEC / NEC
E	ATEX / IECEx / CEC / NEC with ½" NPT adapter
N	Not approved

NOTICE

Version E (section **f**) is only available with design »M« and »S« (section **b**).

g	Output
R 3	Start/Stop with sensor parameters upload function

DELIVERY



Sensor

Accessories have to be ordered separately

Manuals, Software & 3D Models available at:
www.temposonics.com

* / Non standard stroke lengths are available; must be encoded in 5 mm / 0.1 in. increments

3/ Encode in meters if using metric stroke length. Encode in feet if using US customary stroke length

UNITED STATES
Temposonics, LLC
Americas & APAC Region
3001 Sheldon Drive
Cary, N.C. 27513
Phone: +1 919 677-0100
E-mail: info.us@temposonics.com

GERMANY
Temposonics
GmbH & Co. KG
EMEA Region & India
Auf dem Schüffel 9
58513 Lüdenscheid
Phone: +49 2351 9587-0
E-mail: info.de@temposonics.com

ITALY
Branch Office
Phone: +39 030 988 3819
E-mail: info.it@temposonics.com

FRANCE
Branch Office
Phone: +33 6 14 060 728
E-mail: info.fr@temposonics.com

UK
Branch Office
Phone: +44 79 44 15 03 00
E-mail: info.uk@temposonics.com

SCANDINAVIA
Branch Office
Phone: +46 70 29 91 281
E-mail: info.sca@temposonics.com

CHINA
Branch Office
Phone: +86 21 2415 1000 / 2415 1001
E-mail: info.cn@temposonics.com

JAPAN
Branch Office
Phone: +81 3 6416 1063
E-mail: info.jp@temposonics.com

Document Part Number:
551676 Revision D (EN) 02/2018



temposonics.com